


Cylindrical Lamp Poles with Door

Cylindrical Lamp Poles

- Manufactured acc. to DIN EN 40
- Material steel, inside and outside hot-dip galvanized acc. to DIN EN ISO 1461
- Optionally powder coated
- Standard spigot size 76 mm, at the bottom 114 mm optional spigot size 60 mm
- Mounting height, see table
- Inset door, flush
- Door lock triangular 12 mm, V2A / M 10
- Equipment holder 450 mm, 2 sliding nuts M 6, threaded hole M 8
- Sections: (example for mounting height 6 m)

	L [mm]	Ø [mm]	Wall thickness [mm]
1 :	2300	114.3	3.2
2 :	2000	88.9	2.9
3 :	2700	76.1	2.6

Available pole heights			
Model	Mounting height in m	Spigot size in mm	Weight in kg
700234	4.0	76	33.5
700235	5.0	76	40.0
700236	6.0	76	49.0
700237	7.0	76	56.0
700238	8.0	76	74.0

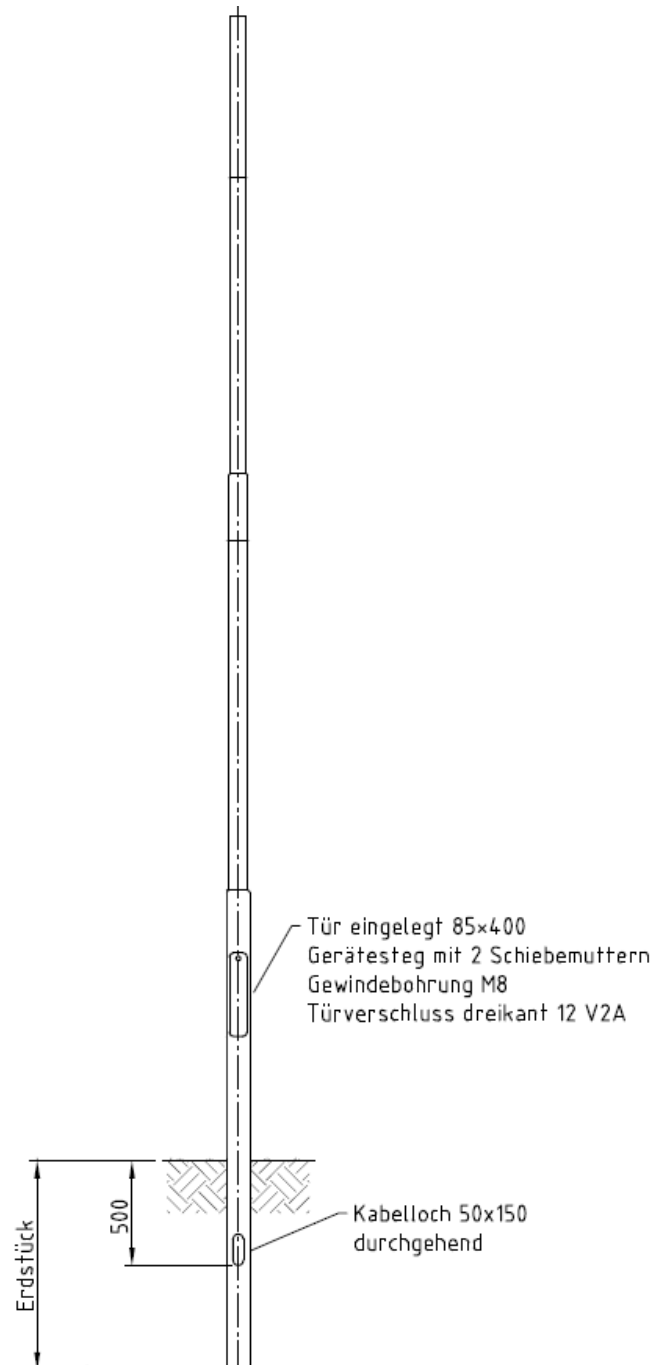

Subject to technical modifications
Part 4 Page 15

19.11.2015